



135mm Fascia

Asphalt/Fibreglass Shingles

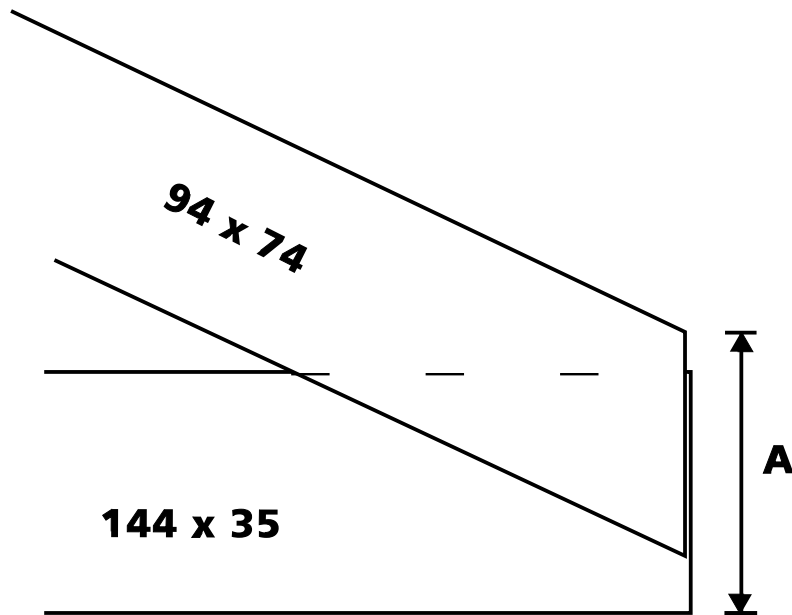

**SOFFIT BEARER TO BE FIXED TO
RIGHT HAND SIDE OF RAFTER**

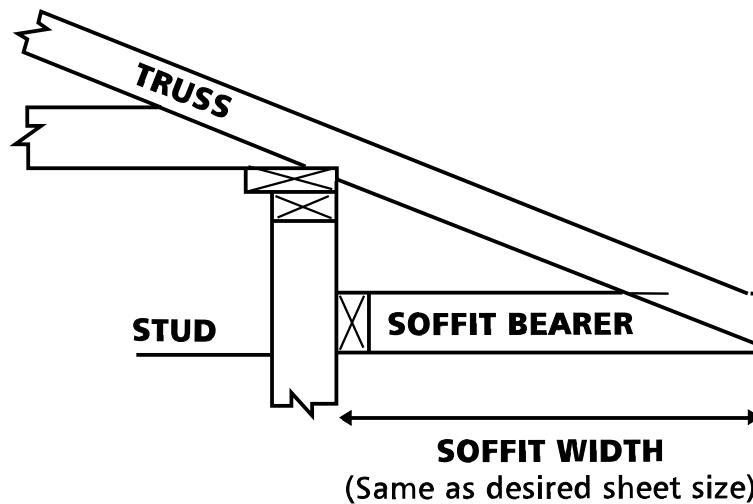

Soffit Drops		
Pitch°	Soffit Drop A	Bearer Size
15	135mm	144mm x 30mm
17.5	135mm	144mm x 30mm
20	140mm	144mm x 30mm
22.5	140mm	144mm x 30mm
25	140mm	144mm x 30mm
27.5	140mm	144mm x 30mm
30	145mm	144mm x 30mm
35	150mm	144mm x 30mm
40	155mm	144mm x 30mm
45	160mm	144mm x 30mm

Steps To Follow

1. Inform precutter at quote time that **Custom External Fascia Gutter** is being used.
2. Keep in contact with the authorised **Custom Fascia Gutter** fixer in your area, keeping them informed of progress and when ready for installation.
3. **Custom Fascia Gutter** can be installed to other fascia company seynouts by a couple of simple alterations. Telephone the **Custom Fascia Gutter** fixer in your area
4. For a quality Installation, scaffolding must be supplied by a builder/customer and:
 - a) must extend 500mm past external/gable corners.
 - b) be approximately 1700mm below rafter end height.
 - c) scaffolding must be erected to OSH safety standards.